

Job _____

Item No _____

FireMax200x2™ Modular Water Heater

Model: FM200x2N™ or FM200x2L™



FEATURES AND BENEFITS

- Single point water, gas and electrical connections
- Factory-provided pressure and temperature relief valve
- All waterways constructed of stainless steel, copper and brass for corrosion protection and clean operation
- Simple, easy maintenance through front panel
- All stainless steel cabinet and frame
- Circulates to hot water storage tank
- All pumps, sensors and controls included

- Woven Fiber Power Burners
- Radial solid copper fin-tube heat exchanger for 360° heat transfer
- Cleanable intake air filters
- Burners activated by water flow and temperature
- Advanced microprocessor controls
- Natural Gas or Liquid Propane 199,900 BTUH per burner
- Stainless Steel Seismic Legs are standard

ACCESSORIES AND OPTIONS


(available at additional cost)

- EZ-Vent Kit for Venting through dishwasher ventilation system (Each burner must be vented separately)
- Factory Authorized StartUp
- Water Hammer Arrester
- Water Pressure Gauge
- Water Temperature Gauge
- Water Pressure/Temperature Gauge
- Water pressure reducing valve (if water supply pressure exceeds 80psi)
- Low Pressure water pressure reducing valve (for dishwasher rinse; installed after booster & before D/W rinse)
- Auxiliary PowerVent required for extended flue lengths. Call factory
- EZ Install Kit
- Expansion Tank




FireMax200x2™ – Modular Water Heater


Model: **FM200x2N™** or **FM200x2L™**

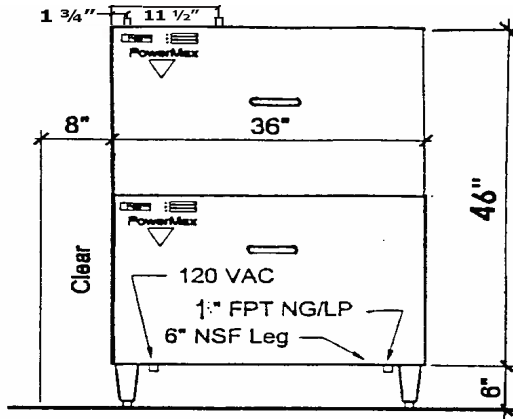


Front Elevation

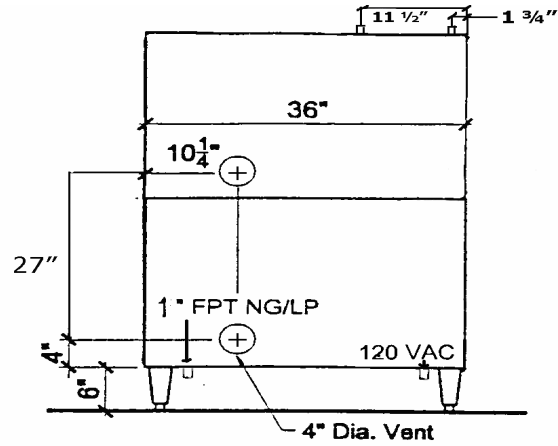

Rear Elevation

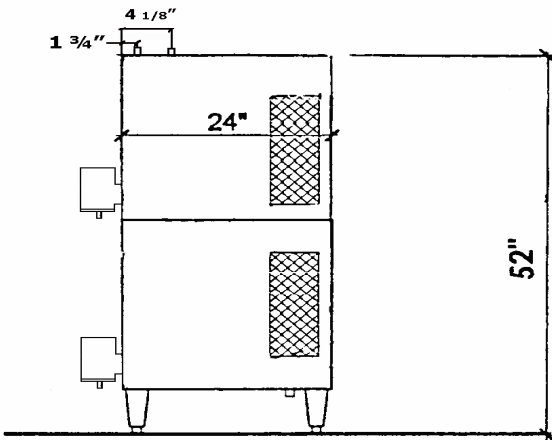

Left Elevation

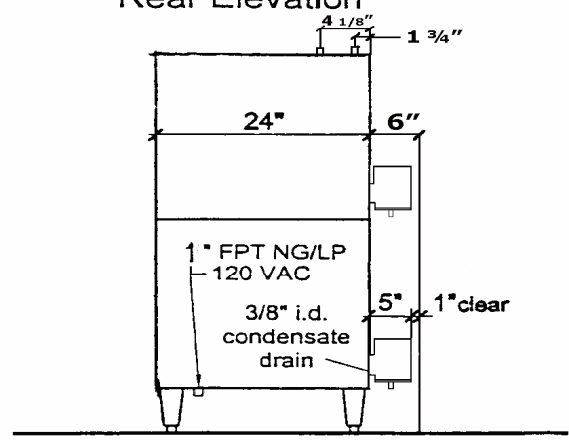

Right Elevation

Model Number	BtuH per burner Natural or Propane	Gas Connection	Water Supply	Electrical Connection	Gas Pressure Regulators	Shipping Weight
FM200x2™	2 @ 199,900	1" NPT	1" NPT	120V 1ph 12.4 amps	Two Supplied	836 lbs

Natural Gas Pressure WC @ Inlet		LP Gas Pressure WC @ Inlet		Manifold Pressure WC		Water Pressure (Flow)		Re-circulating Loop	Clearance From Combustible Surface			Vent Per Local Code
Min	Max	Min	Max	Nat	LP	Min	Max	1"	Side	Top	Rear	Auxiliary Power Vent Required for extended flue lengths Call factory
7"	10.5"	10"	14"	2.75" - 3.5"	6.5" - 8"	40 psi	80 psi	To Storage Tank	6" L 1" R	1"	6" *	

	Temp Rise Output Temp	60°F	70°F	80°F	90°F	100°F	110°F
		110°F	120°F	130°F	140°F	150°F	160°F
FireMax200x2™/120	1 hour	840 gal	735 gal	660 gal	600 gal	552 gal	515 gal
BTU/Storage	2 hour	1560 gal	1350 gal	1200 gal	1080 gal	984 gal	910 gal
Firemax200x2™/240	1 hour	960 gal	858 gal	780 gal	720 gal	672 gal	635 gal
BTU/Storage	2 hour	1680 gal	1470 gal	1320 gal	1200 gal	1104 gal	1030 gal

*1" from back of exhaust vent

Note: May be vented through the dishwasher canopy or pant-leg exhaust system per 1991 Uniform Mechanical Code Sec 916. & 917. Check with local authority





FireMax200x2™ Modular Gas Water Heater specification

Water Heater shall be a FireMax200x2™ gas water heater, Model FM200x2™ as manufactured by Vanguard Technology Inc., Eugene, OR 97402. Water Heater to be fired by two 199,900 Btu woven fiber power burners, using natural gas or liquid propane fuel. Burners to be ignited by means of a hot surface igniter and a redundant intermittent pilot. Heat exchangers to be of heavy duty finned copper tubing, .065" thickness and carry a 5 year limited warranty. Standard equipment to include gas pressure regulating valves, internal bronze-stainless re-circulation pumps, integrated solid state temperature controls, temperature and pressure relief valves, cleanable intake air filters, and LED temperature displays. Water Heater frame, body panels, and flue collars shall be of all stainless steel construction. Unit shall stand on 6 inch adjustable stainless or composite NSF approved legs. Stainless steel front panel to be removable for access to all components without disconnecting water heater from its installed location. Water Heater to be rated at 88%-94% operating efficiency, minimum. Water heater shall be connected and circulated to one or more hot water storage tanks and controlled by temperature sensors in tank(s).